


Tero - CFL Mini globe - 7W - 290 lumen

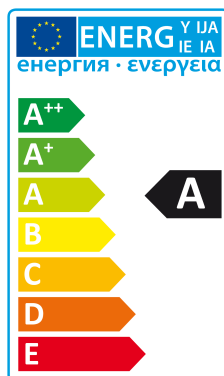

| | | | | | |
|---------------------------|------------|--------|-----------------------------------|---------------|--------|
| 6,7 kWh/1000 | | | 290 lm | | |
| Mini globe 290 lm | | | | | |
| Wattage | Nominal | 7 | Lumen (Lm) | Nominal | 290 |
| | Rated | 6,7 | | Rated | 380,4 |
| Lifetime (H) LLMF 0,65 | Nominal | 10.000 | Lumen maintenance | After 2.000H | 92,77% |
| | Rated | 10.000 | | At 6.000H | 87,79% |
| Incandescent equivalence | 30 | | Candela | - | |
| Halogen equivalence | - | | Beam angle | 360° | |
| On 1 min. / Off 3 min. | >30.000 | | Warm up time to 60% of full light | <100 sec. | |
| Socket | E27 | | Starting time | 0,83 sec | |
| Voltage | 220-240 | | Color temperature (K) | 2700 | |
| Hertz | 50/60 | | Color rendering (RA) | 82 | |
| Milliamps (mA) | 55 | | Mercury type | Amalgam | |
| Power factor | 0,59 | | Mercury content (mg) | 1,2 | |
| Dimensions (mm) | 51x92 | | Dimmable | No | |
| E3light item number | 0801060705 | | EAN | 5700381141075 | |